



NON-INSULATED FIRE RATED ACCESS DOOR
Model KRP-250FR
For Walls Only



KARP ASSOCIATES, INC.

DATE

SPECIFICATIONS

GENERAL SCOPE:

The KRP-250 is non-insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in wall, and may be used in 2 hour fire rated wall assembly.

CONSTRUCTION

1. Frame shall be 4 piece welded 16 gage steel.
2. Door shall be 16 gage steel.
3. Hinge shall be exposed, continuous piano hinge.
4. Door shall have automatic closure, be self-latching and contain interior latch release.
5. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
6. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.



FIRE-RATED ACCESS DOOR INSTALL IN SHEET ROCK, MASONRY, TILE OR PLASTER.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8 x 8	8 3/8 x 8 3/8	1	5.1
12 x 12	12 3/8 x 12 3/8	1	8.5
14 x 14	14 3/8 x 14 3/8	1	9.8
16 x 16	16 3/8 x 16 3/8	1	11.7
18 x 18	18 3/8 x 18 3/8	1	13.8
24 x 24	24 3/8 x 24 3/8	1	20.5
30 x 22	30 3/8 x 22 3/8	1	22.6
30 x 30	30 3/8 x 30 3/8	1	28.2
36 x 24	36 3/8 x 24 3/8	2	28.5
36 x 36	36 3/8 x 36 3/8	2	39.6

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

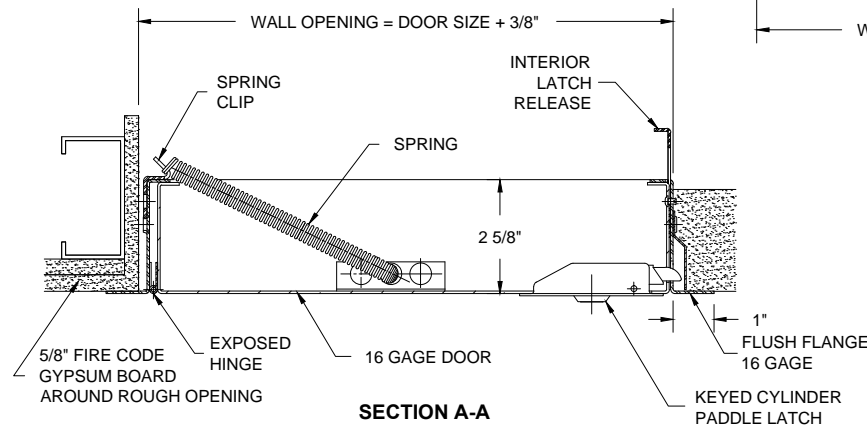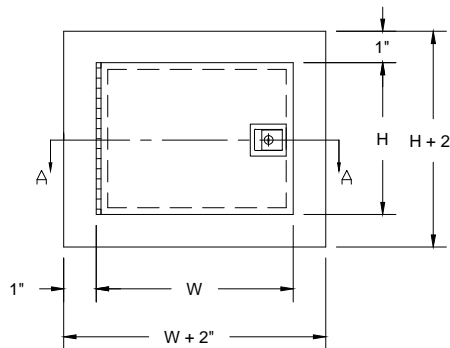

Made with Union Labor



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com