





Three Generations of Quality Metal Products

## VAN-MET® MODEL NWR - Weather Resistant

manufactured to the VAN-MET® design standard

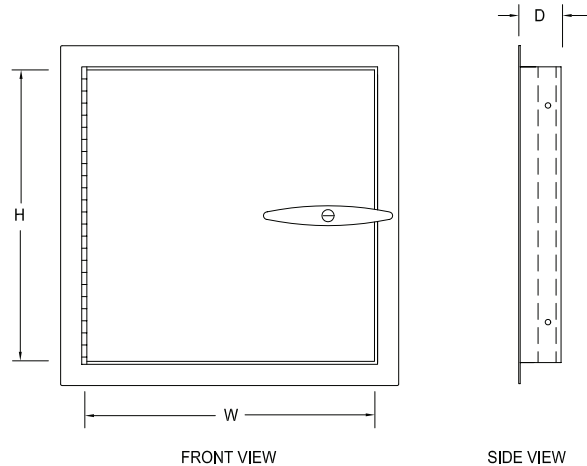

- Ideal for application where moisture or air movement is a consideration.
- Continuous stainless steel piano hinge allows the door panel to open 180° for easy access.
- Standard with inside frame, gasketing on all four sides ensures continuity of the seal.
- Door comes standard with 51mm (2") of semi-rigid fiberglass insulation.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.

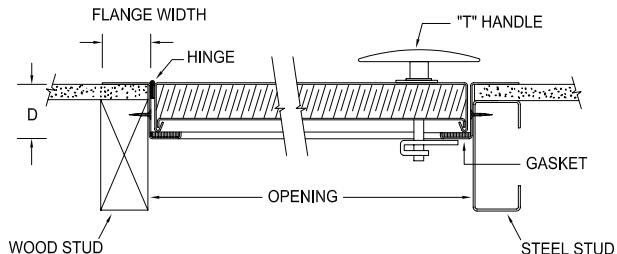

Model NWR met the performance criteria as per CSA A440-00 (windows) for an Air Tightness rating of A-3 at infiltration pressures of 75 Pa and 300 Pa and at exfiltration pressures of 75 Pa and 300 Pa. In Water Tightness by Static Pressure the door sample met a B-4 rating, subject to using an optional watertight mechanism, phone for details. Testing performed by Intertek (Warnock Hersey).

### Material

Satin finish galvanized steel  
 Frame - 1.31mm (18ga)  
 Panel - 1.31mm (18ga)  
 Liner - 1.31mm (18ga)

### Finish

The paint finish is an electrostatically applied rust inhibitive prime coat.

### Hinge

The stainless steel continuous piano hinge allows the door panel to open 180° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

### Latch

#### Standard

Locking "T" handle, operable from handle side only

#### Optional Latches

Non-locking handle, operable from both sides  
 Screwdriver operated cam with an inside handle

### Insulation

51mm (2") fiberglass insulation

### Gasket

Frame gasketed on all four sides

### Flange

Exterior flange  
 Width - 51mm (2")

### Frame Depth

"D" = 60mm (2 3/8")

### Ordering

Please order by rough opening size. These doors are non-returnable.

### Installation

The inner frame is manufactured with embossed mounting holes.

### Optional

Mounting holes available on exterior flange.



**FOR MORE INFORMATION CALL 1-888-926-1365**

Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • [www.sssupply.com](http://www.sssupply.com)