



FIRE RESISTIVE ACCESS DOOR

Model SS-KATR-LL
Lead Lined Access Door



KARP ASSOCIATES, INC.
84-84 43rd Street, Maspeth, NY 11378
(718) 784-2105 - Phone
(718) 784-9188 - Fax

SPECIFICATIONS

GENERAL SCOPE:



Access doors shall be Karp Type KATR as manufactured by Karp Associates, Inc., N.Y.
Sizes shall be as indicated on the drawings.

CONSTRUCTION:

1. Frame shall be 18 gage steel and doors all be 18 gage steel.
2. Door shall be recessed 1 1/2" to accommodate double thickness of wall board.
3. Hinge shall be exposed, continuous piano hinge.
4. Locks shall be flush and screwdriver operated with 1 1/2" stainless steel cam and lock studs, or shall be key operated cylinder lock with automatic dust shutter. Furnished with plastic grommet for studs only to protect hole made in wall board.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.
6. Sheet metal meets National Council of Radiation Protection Report #49.
7. Varying thicknesses of lead available. Custom door sizes also available.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
12 x 12	10 1/2 x 10 1/2	1	6.7
18 x 18	16 1/2 x 16 1/2	2	11.6
24 x 24	22 1/2 x 22 1/2	2	18.1
30 x 22	28 1/2 x 20 1/2	2	19.5

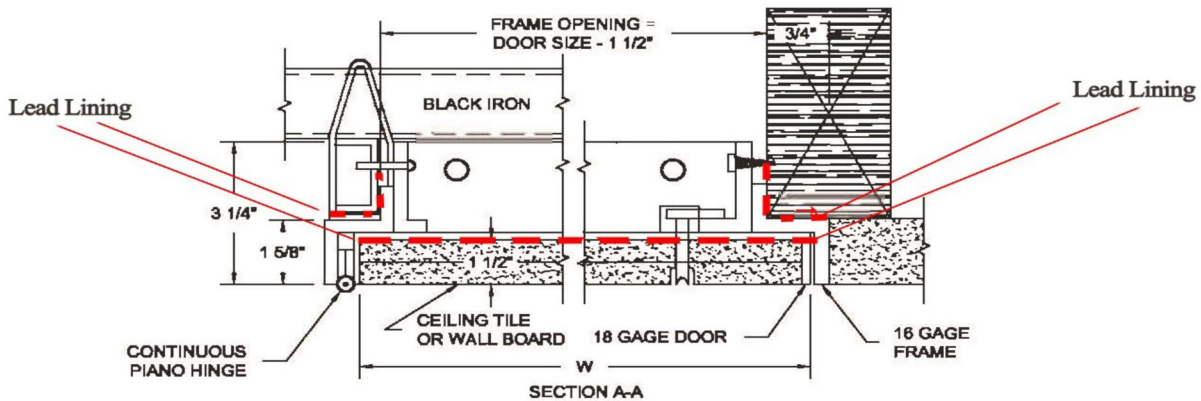

FOR MORE INFORMATION CALL 1-888-926-1365
Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com