





Three Generations of Quality Metal Products

VAN-MET® MODEL NGP - Gasketed Interior / Exterior

manufactured to the **VAN-MET®** design standard

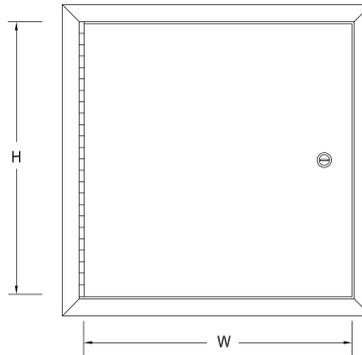


FRONT VIEW



SIDE VIEW

- Ideal for application where moisture or air movement is a consideration.
- Door panel flush to frame with reinforced edges.
- Flange width can be customized to suit your needs.
- Continuous stainless steel piano hinge allows the door panel to open 180° for easy access.
- Standard with inside frame, gasketing on all four sides ensures continuity of the seal.
- Available with 25mm (1") foil faced insulation.
- Exterior appearance is compatible with the non-rated and fire-rated Van-Met access door line, so uniformity of design is maintained when the doors are installed in the same building.
- This door is available in stainless steel (Model NGS). Contact Maxam for more details.

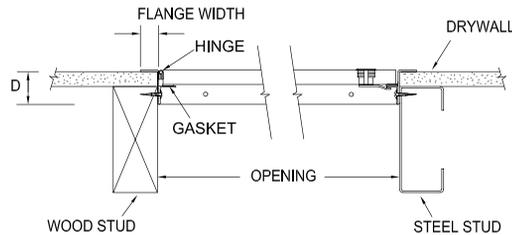

Model NGP met the performance criteria as per CSA A440-00 (windows) for an Air Infiltration of A-3 for both 75 Pa and 300 Pa, for Air Exfiltration the sample met an A-3 rating at 75 Pa and A-2 rating at 300 Pa. In Water Tightness by Static Pressure the door sample met a B-1 rating, subject to using an optional watertight mechanism, phone for details. Testing performed by Intertek (Warnock Hersey).

Material

Satin finish galvanized steel
 Frame - 1.61mm (16ga)
 Panel - 1.61mm (16ga)

Finish

The paint finish is an electrostatically applied rust inhibitive prime coat.

Hinge

The continuous stainless steel piano hinge allows the door panel to open 180° for easy access. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

Latch

Standard

Screwdriver operated cylinder cam latch(es)

Optional Latches

1/4" allen key cylinder cam latch
 Non-locking two position handle

Optional Locks

Cylinder key lock
 1 1/8" mortise prep complete with mortise cylinder

Optional

1 1/8" mortise prep only

Gasket

Frame gasketed on all four sides

Flange

Exterior flange

Width - 19mm (3/4") up to and including 914mm x 914mm (36" x 36")
 Width - 32mm (1 1/4") greater than 914mm x 914mm (36" x 36")

Frame Depth

"D" = 45mm (1 3/4")

Ordering

Please order by rough opening size. These doors are non-returnable.

Installation

The frame is manufactured with mounting holes. Factory installed anchor straps are available for masonry, upon request.



FOR MORE INFORMATION CALL 1-888-926-1365

Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com