

CABINET MEASURING GUIDELINES

SAFEGUARD Fire Rating Assembly




Non-Rated



ELITE Series cabinet fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Features full length piano type hinge.

How to Measure a Cabinet




Rough opening for all cabinets should be 1/4" larger than actual tub size.


Trim Style measurement varies depending on the type and size of cabinet. ELITE series semi-recessed is 1 1/2" for 5lb., 2 1/2" for 10lb, and 3" for 20lb. Fully recessed is 1/4" for all sizes. ELITE series fire-rated semi-recessed is 1 1/2" for 5lb., 3" for 10lb., and 4" for 20lb. Fire-rated fully recessed is 1/4" for all sizes. TITAN series aluminum cabinets are only available in the 10lb with the same trim sizes as the ELITE series. SONOMA series cabinets are all trimless.

For more information on measuring and specifying the size of cabinet you need, contact our customer service department.

SONOMA Series Fire Rating Assembly




SONOMA Series Non-Rated



SONOMA Series cabinets are fully recessed and have a concealed hinge.

INSTALLATION OPTIONS

Installs in concrete, masonry, wood, and metal stud walls

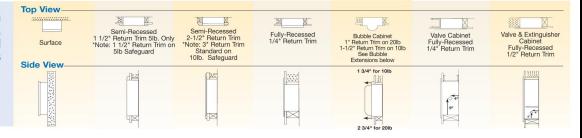

FIRE-RATED INSTALLATION GUIDELINE




RNOCK HERSEY UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers.

Warnock Hersey has approved the Safeguard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. MOUNT-ING INSTRUCTIONS are supplied with each safeguard cabinet.


SAFEGUARD

Typical Semi-Recessed Fire Rated Installation

ONE HOUR FIRE WALL SYSTEM 5/8" Type X Gypsum Board



TWO HOUR FIRE WALL SYSTEM





FOR MORE INFORMATION CALL 1-888-926-1365