



AS-9000

SPECIALTY DOORS Gasketed Access Door

Application

- Designed to provide a gasketed fit in all types of walls and ceilings
- This door is commonly used in clean rooms, laboratories, operating rooms, etc.

Product Features

- Gasketed access door
- Formed door panel with reinforced edges and a concealed hinge, along with open cell gasket between the door and frame

AS-9000 Access Door Specifications:

Door / Door Frame: Stainless Steel or Steel: 18 gauge door, 18 gauge mounting frame, flange to be 1" wide

Hinge: Concealed

Gasket: Pemko S88 adhesive-backed bulb silicone gasket

Standard Latch: Stainless steel screwdriver operated cam latch

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch

Finish: Stainless steel: #4 satin polish. Steel: 5 stage iron phosphate with prime coat of White alkyd baked-on enamel

Please note the AS-9000 has not been tested for air penetration. For a door that has been tested for Air & Water penetration see ADWT model.




AS-9000 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
Inches	mm	lbs.	kg.
12 X 12	305 X 305	6	2.7
16 X 16	406 X 406	10	4.5
18 X 18	457 X 457	11.5	5.1
24 X 24	610 X 610	19	8.4
24 X 36	610 X 914	28	12.4

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

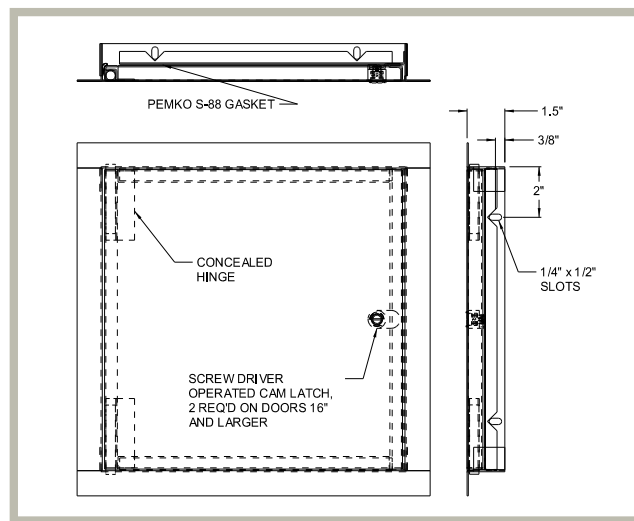

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.




FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com



AS-9000

GASKETED FLUSH MOUNT

QTY.	NOMINAL SIZE	A	B	C	D	E	F	LATCH
	8 x 8 (203 x 203)	7.875 (200)	7.843 (200)	10.00 (254)	10.00 (254)	8.19 (208)	8.09 (205)	1
	12 x 12 (305 x 305)	11.875 (302)	11.843 (301)	14.00 (355)	14.00 (355)	12.19 (310)	12.09 (307)	1
	16 x 16 (406 x 406)	15.875 (403)	15.843 (402)	18.00 (457)	18.00 (457)	16.19 (411)	16.09 (409)	2
	18 x 18 (457 x 457)	17.875 (454)	17.843 (453)	20.00 (508)	20.00 (508)	18.19 (462)	18.09 (459)	2
	24 x 24 (610 x 610)	23.875 (606)	23.843 (605)	26.00 (660)	26.00 (660)	24.19 (614)	24.09 (612)	2
	24 x 36 (610 x 914)	35.875 (911)	23.843 (605)	26.00 (660)	38.00 (965)	24.19 (614)	36.09 (917)	2

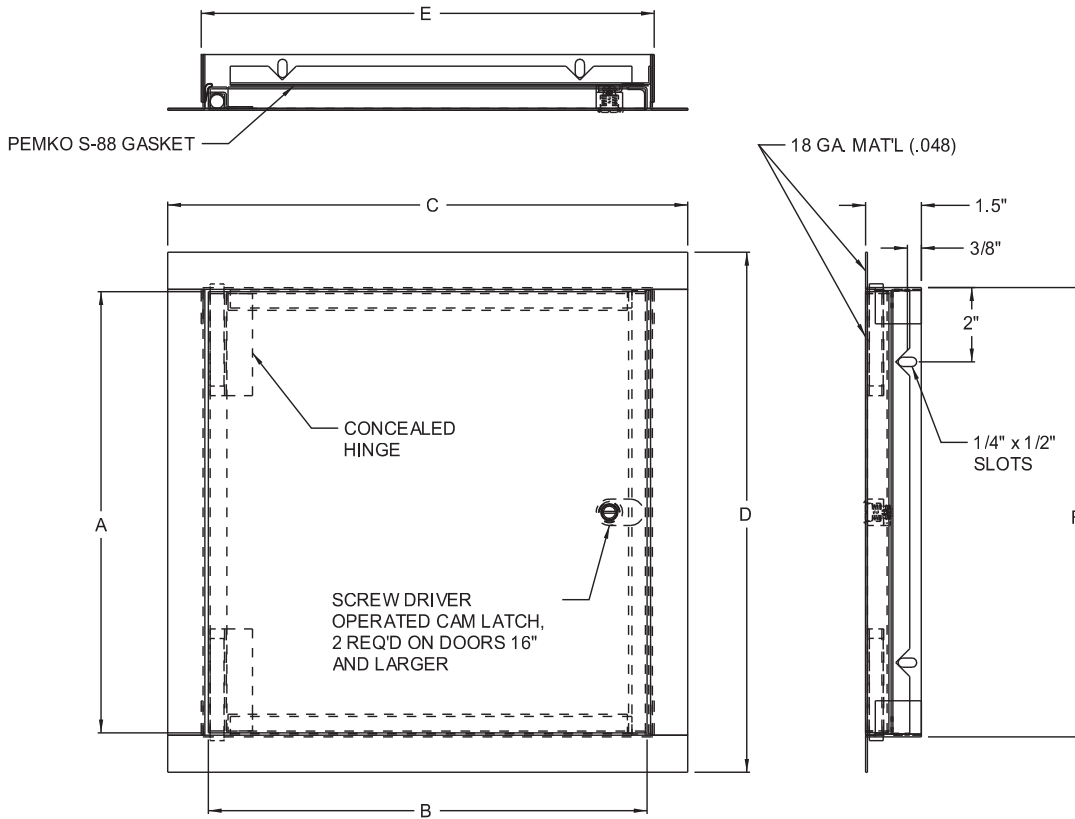

STANDARD FEATURES: SCREW DRIVER OPERATED CAM LATCH, CARBON STEEL, PRIME COAT BAKED ENAMEL FINISH

OPTIONS:

- LOCK TYPE
- CYLINDER LOCK & KEY
 - ALLEN HEAD CAM LATCH
 - SPANNER HEAD CAM LATCH
 - THUMB TURN LATCH
 - OTHER

- MATERIAL
- STAINLESS STEEL
 - OTHER

- FINISH
- #4 SATIN POLISH
 - OTHER

JOB NAME:
CUSTOMER:

APPROVED BY:
DATE:

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com