

**EMERGENCY LIGHTING SOLUTIONS**



Patent Numbers:  
US5,526,251  
D379,373  
US5,797,673




Optional self diagnostic self test feature

**Model # PCELRU**

A combination LED exit/emergency lighting unit in one clean, low profile modern design

**Features**

- Completely self-contained.
- Fully Automatic Operation.
- Universal mounting canopy for top installation.
- Energy consumption of less than 2 watts for red letters and less than 1 watt for green letters
- Compact, low profile design in neutral finish.
- LED lamp life of 25 years.
- Push to test switch.
- 6-Volt pure lead, maintenance-free battery.
- Environmentally-coated, solid state charger.
- Automatic, low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC operation.
- Standard with two fully adjustable, glare-free lighting heads.
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing.
- Charge rate/power on LED indicator light.

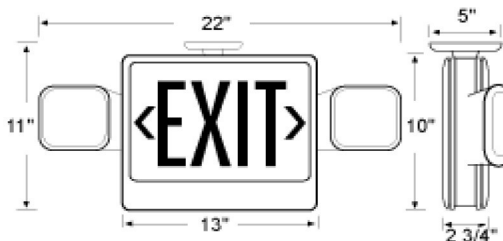

**Ordering Information**

Series	Canopy	Number of Faces	Letter Color	Housing Color	Models available for Quick Ship Program
PCE	Standard	Universal	R - Red G - Green	W - White B - Black	Model # PCELRU Model # PCELGU-B



**FOR MORE INFORMATION CALL 1-888-926-1365**  
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • [www.sssupply.com](http://www.sssupply.com)