

SUBMITTAL: 3600 SERIES FIRE-FX2™ FIRE-RATED BLANKET/EXTINGUISHER CABINET - ALUMINUM PG 1 OF 2

Door and Trim Construction: No 180 clear anodized aluminum. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. Full glazed front with pull handle. Theft-deterrent SAF-T-LOK™ also available.

Trim Style and Depth: Recessed- 3/8" Flat Trim Semi-Recessed -1-1/2" Square Trim, 2-1/2", 4" or 4-1/2" Rolled Edge. Rolled edge models are constructed of mechanically-joined extrusions. 1-3/4" face trim on frame and 1-1/4" trim on doors with glazing.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Fire-resistant material is attached to the exterior of the tub.

Shelf: Shelf is located 9" from the top of the cabinet, providing storage for the blanket above the extinguisher.

Blanket: Includes a nominal 62" x 80" x 2.75 lb., processed wool/synthetic fire blanket which meets the Flammable Fabrics Act: Flammability of Clothing Textiles, Title 16, CFR1610.

Fire Rating: Fire-FX2™ cabinets are UL listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/ULC-S115, when properly installed in a wall assembly according to installation instructions.

STEP 1: SELECT DOOR STYLE WITH HANDLE

- ☐ **F** Full Glazing in 1-1/4" wide Frame
☐ **G** Full Glazing with SAF-T-LOK in 1-1/4" Frame
☐ **D** Horizontal Duo Panel
☐ **E** Horizontal Dual Panel with SAF-T-LOK
☐ **S21** Solid Door

Check one box below Examples on Page 2

- ☐ **L22** Solid with SAF-T-LOK
☐ **L24** Solid with Cylinder Lock - No Handle
☐ **V** Vertical Duo
☐ **W** Vertical Duo with SAF-T-LOK
☐ **B** Solid with 2" x 4" View Window & SAF-T-LOK

STEP 2: SELECT DOOR GLAZING

- ☐ **10** Clear Acrylic
☐ **17** Clear Tempered Glass

STEP 3: OPTIONAL FEATURES AT ADDITIONAL COST:

- ☐ Dark Bronze Anodized Finish: (pull painted to match)
☐ Color Tub - Red
☐ Color Tub - Black
☐ Brigadier Alarm
☐ Commander Alarm

- ☐ Futura "Fire" Handle __ Mill __ White __ Red
☐ (PRH) Flush Pull Handle
☐ "Fire Blanket" Letters - Red Horizontal **LDCHRFB**
☐ Black Vertical FE Letters **LDCVBFE**
☐ Red Vertical FE Letters **LDCVRFE**


- ☐ White Vertical FE Letters **LDCVWFE**
☐ Black Horizontal FE Letters **LDCHBFE**
☐ Red Horizontal FE Letters **LDCHRFE**
☐ White Horizontal FE Letters **LDCHWFE**



Model 367F10FX2

QTY	TRIM & DOOR & SERIES #		TUB I.D.			FRAME O.D.		WALL OPENING			Fits Fire Extinguishers
	Model	Trim Style	A	B	C	E	F	W	H	D	
	3625	Flat Trim	12"	36"	8"	15-3/8"	39-3/8"	14 5/16"	38 5/16"	8 15/16"	Cosmic & Galaxy 2.5-10, Any Mercury
	3626	1-1/4" Square Edge	12"	36"	8"	15-3/8"	39-3/8"	14 5/16"	38 5/16"	7 15/16"	Sentinel 5-10, Saturn 15-25, Grenadier P.
	3627	2-1/2" Rolled Edge	12"	36"	8"	15-3/8"	39-3/8"	14 5/16"	38 5/16"	7 5/16"	Nebula 270
	3622	4" Rolled Edge—Recessed Pull	12"	36"	8"	15-3/8"	39-3/8"	14 5/16"	38 5/16"	6"	
	3628	4-1/2" Rolled Edge	12"	36"	8"	15-3/8"	39-3/8"	14 5/16"	38 5/16"	5 5/16"	

Cabinets in Blue Meet 4" Maximum ADA Projection Requirement

 JL INDUSTRIES	Distributor:		Project:
	Contractor:		Approved By:
	Date:	Quantity:	Architect:
	Scale: N/A	Pages: 1 of 2	Item #

© 2024 Activar Construction Products Group, Inc. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OF AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.



6/15/2023




FOR MORE INFORMATION CALL 1-888-926-1365

Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com

SUBMITTAL: 3600 SERIES FIRE-FX2™ FIRE-RATED BLANKET/EXTINGUISHER CABINET - ALUMINUM PG 2 OF 2

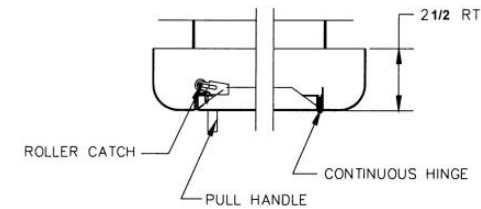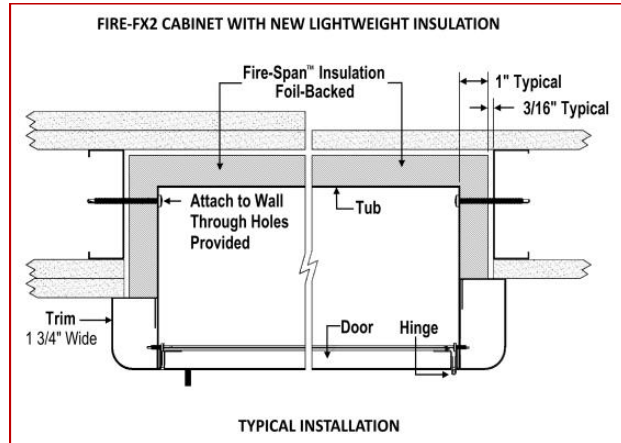

Model 3627F10FX2 Shown Above
4" or 4-1/2" Rolled Trim

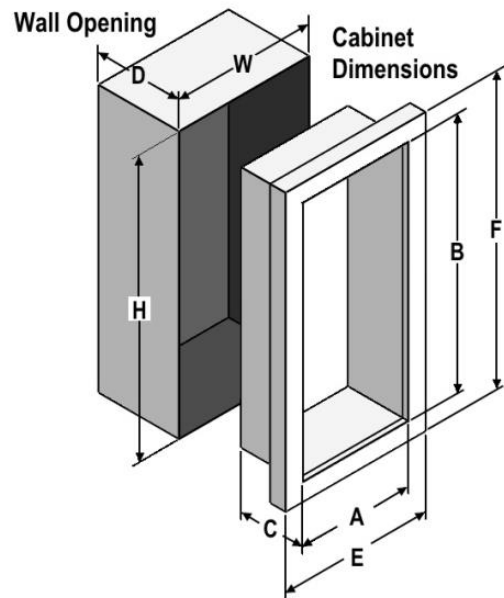


New Lighter, FX2 Insulation



Extruded Rolled Edge
3627, 3622, 3728

ADA Cabinet Mounting Height: Standard Pull on G, E, W, L22 and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock or Recessed Pull are Centered on Door.

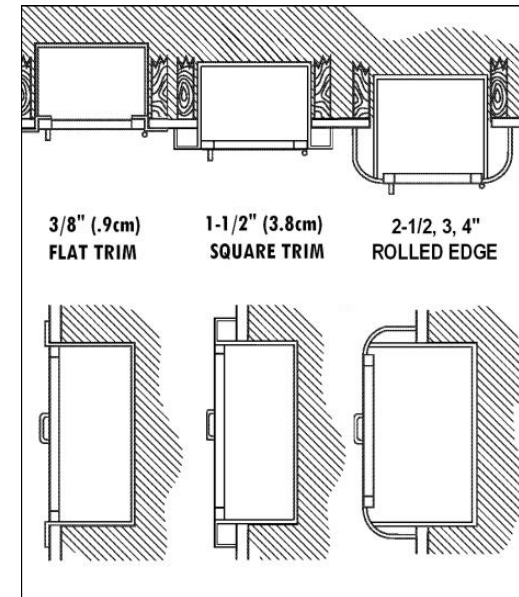

FOR MORE INFORMATION CALL 1-888-926-1365

Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com