

SUBMITTAL: FD2L™ SERIES 2 HR FIRE-RATED LAUNDRY/GARBAGE DOOR FOR WALLS

PG 1 OF 1

A Specialty two hour fire-rated door for laundry or garbage chute access. The wider 1-3/4" Flange covers opening edges and the handle provides easy access to the chute.

Materials: Satin finish galvanized steel or 304 stainless steel.

Frame: 16 ga (1.61mm) steel with mounting holes. Depth "D"= 2-3/4" (70mm).

Flange: Width 1-3/4" (45mm) with a 3/8" (9.52mm) return.

Door Panel - 18 ga (1.31mm) with 22 ga (0.85mm) liner.

Insulation: The door panel contains 1-1/2" (38mm) of high temperature insulation material.

Finishes: Rust-inhibitive off-white prime coat or # 4 polished stainless steel finish on exterior surface.


Hinges: The continuous stainless steel piano hinge is designed to secure the door panel and open to 180°. The hinge is placed on the long side of the door ("H" dimension) unless otherwise requested.

Panel Closer: Listed concealed door closure that self-closes and latches the door as required by NFPA 80.

Latch: The standard factory installed latch is a non-locking (N) chrome "T" handle. Interior latch release optional.

Sizes: Made to Order. Minimum size is 16" x 16", maximum size 30" x 30".

Clear Opening: Width minus 1-1/4", Height minus 1-1/4".

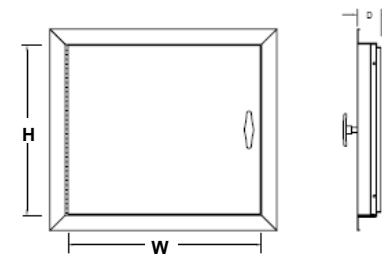

STEP 1: ENTER ORDER SIZE (Each Panel Made to Order)

Size: ___ " Width x ___ " Height (hinge side)

Rough Opening is order size

Frame is 1/4" less than order width and height.

STEP 2: SELECT MATERIALS

___ Galvanized steel with off-white primer (FD2L)

___ Stainless steel with #4 finish on exterior surface (FD2LSS)

OPTIONAL FEATURES AT ADDITIONAL COST

___ (MP) 1-1/8" Mortise Prep

___ (MPI) 1-1/8" Mortise Prep Complete with Mortise Cylinder

___ (SG) Listed Smoke Gasket


___ (LR) Interior Latch Release



Intertek Warnock Hersey Listed and Labeled
 2 Hour Fire Rating for vertical installation only
 Temp Rise Max: 139°C / 250° F at 30 Min 250° C / 450° F at 60 Min

Testing Standard:
 Vertical: NFPA 252, UL 10B, CAN/ULC S104

Optional Mortise Lock (MPI)

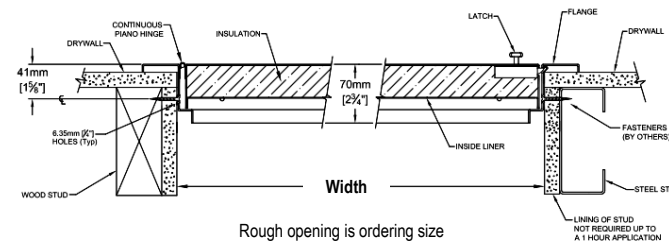

Rough opening is ordering size

| | | |
|-----------|--------------|--|
| | Distributor: | Quantity: |
| | Contractor: | Approved By: |
| | Model #: | Architect: |
| | Project: | Date: © 2021 Activar Construction Products Group, Inc. |
| 3/11/2021 | | |



FOR MORE INFORMATION CALL 1-888-926-1365

Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com