SUBMITTAL: CROWNLINE FIRE-FX2™ CABINETS - STAINLESS STEEL **PAGE 1 OF 2**

Fire-Rated Crownline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers.

Door & Trim: #4 Brushed finish stainless steel. 1-3/4" Trim on face and door. These flush cabinet doors are mounted in a 5/8" door stop, are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors.

Trim Style and Depth: 1-3/4" face trim on frame and 1-1/4" trim on door. Recessed - 3/8" flat trim. Semirecessed - 1-1/4" Square Edge or 2-1/2" Rolled Edge. See separate submittal for trimless models.


Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub. Please note that dimensions for wall opening have changed in 2015. See Chart on pg 2.

Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided, and must be strictly adhered to, to maintain fire rating.

Special Features: Models 8035, 8036, 8037 & 8039 have a shelf 12" from the bottom of the cabinet and are designed to hold a fire extinguisher plus FD valve or other accessory. Those models can also be ordered without shelf to allow for lower mounting height of valve piping to meet NFPA10.


Fire-Rating: Fire-FX2™ cabinets are fabricated in accordance with the UL label for one and two hour combustible and non-combustible wall system building codes. The fire testing has met the requirement of ANSI/UL 1479 (ASTM –E814) and ULC/CAN S115-for membrane and penetration firestops.





Full glass with pull handle &

E - Horizontal duo panel with pull handle & Saf-T-Lok



S21 - Solid with pull handle

A - Center duo pa with pull and Saf-T-Lok

FIRE-FX2 CABINET WITH NEW LIGHTWEIGHT INSULATION → - 3/16" Typica Attach to Wall TYPICAL INSTALLATION

STEP 1: SELECT MODEL NUMBER, TRIM & QUANTITY (Refer to Chart on Page 2)

STEP 2:	SELECT	DOOR STY	LE WITH HANDLE	(Check one box below)

	·	 •	•
F	Full Glazing	L22	Solid with SAF-T-LOK™
G	Full Glazing with SAF-T-LOK™	٧	Vertical Duo
D	Horizontal Duo Panel	W	Vertical Duo with SAF-T-LOK™
Ε	Horizontal Dual Panel with SAF-T-LOK™	В	Solid w/Small View Window & SAF-T-LOK $^{\text{TM}}$
Α	Center Duo Panel with SAF-T-LOK™	L24	Solid with Cylinder Lock & No Handle
S2'	1 Solid Door	View	v Door Styles

STEP 3: SELECT DOOR GLAZING

15 Bronze Acrylic

0710 Flush Pull Handle

10 Clear Acrylic 13 Clear Wire Glass with Safety Film (Check one box below) 16 Gray Acrylic

17 Clear Tempered Glass

18 Laminated Safety Glass


STEP 4: OPTIONAL FEATURES AT ADDITIONAL COST:

#6 Matte Finish Stainless Steel Door & Trim					
#7 Polished Stainless Steel Door & Trim		P6 Polished Chrome Lever Handle			
#8 Mirror Finish Stainless Steel Door & Trim		FDVO Decal "Fire Dept Valve" Octagonal 6 x 6"			
Optional Tub Color: BlackRed		1403 Decal "Fire Hose" Vert. Blk Bkgd, Red Letters 4 x 9			
CA Commander Alarm		DCHFDV-R Diecut"Fire Dept Valve" Horiz. 10-3/4 x 4-3/8			
BA Brigadier Alarm		DCVRFDV Diecut "Fire Dept Valve" Vert 3/4" x 17"			
PUF Futura "Fire" Handle		#4 Finish Stainless Tub			
·		•			

BIM OBJECTS FOR REVIT® PLATFORM

Black Vertical FE Letters LDCVBFE Red Vertical FE Letters LDCVRFE White Vertical FE Letters LDCVWFE Black Horizontal FE Letters LDCHBFE Red Horizontal FE Letters LDCHRFE White Horizontal FE Letters LDCHWFE **Etched or Engraved Lettering - Metal/Glass**


For More Options, Visit These Links to Separate Submittals: Decals & Die Lettering, Alarms, Pulls & Levers, Fire Extinguishers, Fire Hose Racks



10/10/16



SUBMITTAL: CROWNLINE FIRE-FX2 CABINETS - STAINLESS STEEL PAGE 2 OF 2

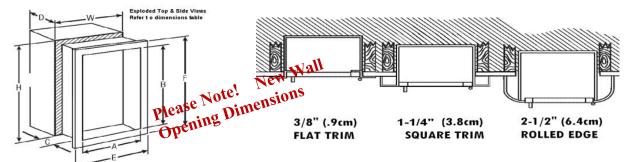

								-		
TRIM & DOOR MATERIAL & SERIES		TUB I.D. W x H x D in Inches		FRAME O.D.		FX Wall Opening New Dimensions 2015 - Please Note			RECOMMENDED HOSE RACK, FIRE DEPARTMENT VALVES	
QTY # TRIM STYLE		Α	В	С	Е	F	Width Hei			& EXTINGUISHERS
							nguisher or			nent Valve
6035 FLAT	Γ TRIM 3/8" ●	24	30	6	27 3/8	33 3/8	26 5/16 32			HOSE RACK:
	" SQUARE EDGE•	24	30	6	27 3/8	33 3/8			5 15/16	1- 1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (3005, 3105,
	" ROLLED EDGE•	24	30	6	27 3/8	33 3/8			4 11/16	3007, 3107) plus Cosmic 2.5 or Galaxy 2.5-5 lb Extinguisher
6235 FLAT	Γ TRIM 3/8"•	24	34 3/4	6	27 3/8	38 1/8	26 5/16 37	1/16	6 15/16	HOSE RACK:
6236 1-1/4	"SQUARE EDGE•	24	34 3/4	6	27 3/8	38 1/8	26 5/16 37	1/16	5 15/16	1- 1/2" x 1-1/2" Hose Rack Unit 100' Hose (3010 or
6237 2-1/2	"ROLLED EDGE•	24	34 3/4	6	27 3/8	38 1/8	26 5/16 37	1/16	4 11/16	3110) plus Cosmic 2.5 or Galaxy 2.5-5 lb Extinguisher
6135 FLAT	Γ TRIM 3/8" •	24	30	8	27 3/8	33 3/8	26 5/16 32	5/16	8 15/16	HOSE RACK:
6136 1-1/4	"SQUARE EDGE•	24	30	8	27 3/8	33 3/8	26 5/16 32	5/16	7 15/16	2-1/2" x 1-1/2" Hose Rack Unit
6137 2-1/2	" ROLLED EDGE•	24	30	8	27 3/8	33 3/8	26 5/16 32	5/16	6 11/16	50 or 75' Hose (3205, 3207)
6435 FLAT	ΓTRIM 3/8"•	24	34 3/4	8	27 3/8	38 1/8	26 5/16 37	1/16	8 15/16	HOSE RACK:
6436 1-1/4	" SQUARE EDGE•	24	34 3/4	8	27 3/8	38 1/8	26 5/16 37	1/16	7 15/16	2-1/2" x 1-1/2" Hose Rack Unit
6437 2-1/2	" ROLLED EDGE•	24	34 3/4	8	27 3/8	38 1/8			6 11/16	100' Hose (3210 Series)
6635 FLAT	ΓTRIM 3/8" ●	24	38 3/4	8	27 3/8	42 1/8	26 5/16 41		8 15/16	HOSE RACK:
6636 1-1/4	" SQUARE EDGE•	24	38 3/4	8	27 3/8	42 1/8	26 5/16 41	1/16	7 15/16	2-1/2" x 1-1/2" Hose Rack Unit
6637 2-1/2	" ROLLED EDGE•	24	38 3/4	8	27 3/8	42 1/8	26 5/16 41	1/16	6 11/16	125' Hose (3212 Series)
6335 FLAT	ΓTRIM 3/8" •	30	30	8	33 3/8	33 3/8	32 5/16 32	5/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
6336 1-1/4	" SQUARE EDGE•	30	30	8	33 3/8	33 3/8	32 5/16 32			1-1/2" OR 2-1/2" Valve , 50' or 75' Hose Rack Unit Plus
	" ROLLED EDGE•	30	30	8	33 3/8	33 3/8			6 11/16	FD Valve or Extinguisher (except Sentinel 10-20 & 272)
	ΓTRIM 3/8"•	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16 37		8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
6536 1-1/4	"SQUARE EDGE•	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16 37	1/16	7 15/16	1-1/2" OR 2-1/2" Valve , 100' Hose Rack Unit
6537 2-1/2	" ROLLED EDGE•	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16 37	1/16	6 11/16	Plus FD Valve or Extinguisher (except Sentinel 20 & 272)
7235 FLAT	ΓTRIM 3/8" •	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16 41	1/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER:
	"SQUARE EDGE•	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16 41		7 15/16	1-1/2" OR 2-1/2" Valve , 125' Hose Rack Unit
7237 2-1/2	" ROLLED EDGE•	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16 41	1/16	6 11/16	Plus FD Valve or Extinguisher (except Sentinel 10-20 & 272)
	Cabinets for Fire Department Valves									
8535 FLAT	ΓTRIM 3/8" •	18	18	8	21 3/8	21 3/8	20 5/16 20	5/16	8 15/16	
8536 1-1/4	"SQUARE EDGE•	18	18	8	21 3/8	21 3/8	20 5/16 20			
8537 2-1/2	" ROLLED EDGE•	18	18	8	21 3/8	21 3/8	20 5/16 20	5/16	6 11/16	FIRE DEPARTMENT VALVE: 1-1/2" or 2-1/2" Fire Department Valve
8435 FLAT	ΓTRIM 3/8" •	18	18	10	21 3/8	21 3/8	20 5/16 20	5/16	10 15/16	with Cap and Chain
	"SQUARE EDGE•	18	18	10	21 3/8	21 3/8			9 15/16	mar dap and chain
8437 2-1/2	" ROLLED EDGE•	18	18	10	21 3/8	21 3/8	20 5/16 20	5/16	8 11/16	
	ΓTRIM 3/8" ●	26	26	8	29 3/8	29 3/8			8 15/16	DUAL SIDE BY SIDE
8736 1-1/4	" SQUARE EDGE•	26	26	8	29 3/8	29 3/8			7 15/16	FD VALVES & EXTINGUISHER
8737 2-1/2	" ROLLED EDGE•	26	26	8	29 3/8	29 3/8	28 5/16 28	5/16	6 11/16	OR 2 FD VALVES:
8636 FLAT	ΓTRIM 3/8" ●	26	26	10	29 3/8	29 3/8			10 15/16	1-1/2" or 2-1/2" with Cap and Chain Plus
8636 1-1/4	" SQUARE EDGE•	26	26	10	29 3/8	29 3/8			9 15/16	Extinguisher - Cosmic & Galaxy 2-1/2-10, Mercury 2-1/2 -11, Grenadier, Saturn 15-25, Sentinel 5
	" ROLLED EDGE•	26	26	10	29 3/8	29 3/8			8 11/16	-11, Grenauler, Galum 13-23, Seminel 3
8035 FLAT	ΓTRIM 3/8" ●	16	40	9	19 3/8	43 3/8	18 5/16 42	5/16	9 15/16	DUAL EXTINGUISHER & FD VALVE
	"SQUARE EDGE•	16	40	9	19 3/8	43 3/8			8 15/16	CABINET WITH SHELF: Shelf is 12" from bottom. Any
8037 2-1/2	" ROLLED EDGE•	16	40	9	19 3/8	43 3/8	18 5/16 42	5/16	7 11/16	Extinguisher (Except Sentinel 15-20, & 272)

SUPERIOR PECENITY CIPPEN

FOR MORE INFORMATION CALL 1-888-926-1365